

CITYLINE LDAOSP06.6CL

OUTDOOR LED SCREENS FOR DIGITAL
OUT-OF-HOME MESSAGING AT EXTREME
ENVIRONMENTS



- Aluminum fanless design for high performance under extreme conditions
- Adjustable brightness optionally up to 10.000nits
- Lower power consumption with common-cathode technology
- Lightweight for easy adaptation and low cost framework design
- Production level calibration for best color uniformity

ISTIKBAL
BURSA / TURKEY



General

Operating environment	outdoor
Pixel pitch	6.67mm
Service type	front and rear access
Calibrated brightness (nits)	6.500nits
Lamp type	SMD
Lifespan (hours at %50 brightness)	>100.000hours
White color calibration (adj.)	3.500K~8.500K
Gray scale	>16bits
Brightness control	256 level

Module Specifications

Module dimensions (mm)	480x320
Refresh frequency	3.840Hz
Module resolution	72x48px
LED drive method	dynamic
Module material	aluminum
Module type	sealed
PCB type	multilayer
PCB surface coating	humiseal

Panel Specifications

Panel material	aluminum
Panel paint	ES powder coated
Panel dimensions (mm) ¹	960x960
Panel depth	94mm
IP level	IP67 front, IP65 rear
Panel weight	<29kg
Panel resolution	144x144px
Pixel density (pcs/sqm)	22.500
Viewing angle (horizontal x vertical)	>160° x 140°
Minimum viewing distance	>6m
Operating temperature range	-20°C ~ +60°C
Storage temperature range	-25°C ~ +60°C
Operating humidity	10% ~ 90% non-condensing
Power input voltage	110 ~ 240 VAC
Power input frequency	50~60Hz
Average power per sqm	<140W
Max power per sqm	<650W
Active PFC	YES
Load tolerance ²	25% min.
Panel installation type	Fixed installation
Cooling	Passive cooling without fan

Other


Max input resolution	FHD, UHD, 4K, 8K
Standard video sources ³	All digital formats
Brightness adjustment	Automatic & manual
Death pixel monitoring	Optional
Module monitoring	YES
Temperature monitoring	YES
Smoke monitoring	Optional
Voltage monitoring	YES
Power redundancy	N/A
Signal path backup	YES
Signal transmission	CAT or Fiber Optic
Standby scheduling	YES
Power on/off scheduling	Optional
Power saving mode	YES
Certification	CE-EMC, CE-LVD, RoHS, FCC

Options

Energy-friendly (Average/max power per sqm)	70W/350W
Higher Brightness - CLX	8.500nits
Corner installation	90-degree / curved

*The mechanical and electronic specification options are available.

- Panel dimensions can change upon customer request
- That value is the remain capacity of PSU's at 100% brightness and white color content
- Different types of video input available as option

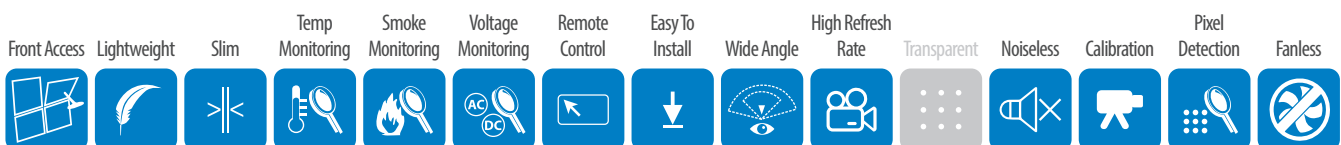

Apron Teknoloji AS. reserves the right to change any product specification, discontinue of any product or services without prior notice

TECHNICAL SPECIFICATIONS

LEDECA