

# CITYLINE LDCOSP06.6CL

OUTDOOR LED SCREENS FOR DIGITAL  
OUT-OF-HOME MESSAGING



- New generation cost effective led screen panel for outdoor use
- Right choice for DOOH media screen installations
- Lightweight for easy adaptation and low cost framework design
- Production level calibration for best color uniformity

## DIGITAL BILLBOARD ISTANBUL / TURKEY



### General

|                                    |               |
|------------------------------------|---------------|
| Operating environment              | outdoor       |
| Pixel pitch                        | 6.6mm         |
| Service type                       | rear access   |
| Calibrated brightness (nits)       | 6.000nits     |
| Lamp type                          | SMD           |
| Lifespan (hours at %50 brightness) | >100.000hours |
| White color calibration (adj.)     | 3.500K~8.500K |
| Gray scale                         | >16bits       |
| Brightness control                 | 256 level     |

### Module Specifications

|                        |              |
|------------------------|--------------|
| Module dimensions (mm) | 320x160      |
| Refresh frequency      | adjustable   |
| Module resolution      | 48x24px      |
| LED drive method       | dynamic      |
| Module material        | plastic (PC) |
| Module type            | apparent     |
| PCB type               | multilayer   |
| PCB surface coating    | humiseal     |

### Panel Specifications

|                                       |                                 |
|---------------------------------------|---------------------------------|
| Panel material                        | galvanized steel sheet/aluminum |
| Panel paint                           | ES powder coated                |
| Panel dimensions (mm) <sup>1</sup>    | 960x960                         |
| IP level                              | IP67 front, IP54 rear           |
| Panel weight                          | 45kg/35kg                       |
| Panel resolution                      | 156x156px                       |
| Pixel density (pcs/sqm)               | 22.500                          |
| Viewing angle (horizontal x vertical) | >120°x120°                      |
| Minimum viewing distance              | >6.6m                           |
| Operating temperature range           | -15°C ~ +45°C                   |
| Storage temperature range             | -40°C ~ +60°C                   |
| Operating humidity                    | 10% ~ 90% non-condensing        |
| Power input voltage                   | 110 ~ 240 VAC                   |
| Power input frequency                 | 50 ~ 60 Hz                      |
| Average power per sqm                 | <150W                           |
| Max power per sqm                     | <650W                           |
| Active PFC                            | YES                             |
| Load tolerance <sup>2</sup>           | 25% min.                        |
| Panel installation type               | Fixed installation              |
| Cooling                               | Internal fan                    |


### Other

|                                     |                           |
|-------------------------------------|---------------------------|
| Max input resolution                | FHD, UHD, 4K, 8K          |
| Standard video sources <sup>3</sup> | All digital formats       |
| Brightness adjustment               | Automatic & manual        |
| Death pixel monitoring              | Optional                  |
| Module monitoring                   | YES                       |
| Temperature monitoring              | YES                       |
| Smoke monitoring                    | Optional                  |
| Voltage monitoring                  | YES                       |
| Power redundancy                    | N/A                       |
| Signal path backup                  | YES                       |
| Signal transmission                 | CAT or Fiber Optic        |
| Standby scheduling                  | YES                       |
| Power on/off scheduling             | Optional                  |
| Power saving mode                   | YES                       |
| Certification                       | CE-EMC, CE-LVD, RoHS, FCC |

### Options

\*The mechanical and electronic specification options are available.

- 1- Panel dimensions can change upon customer request
- 2- That value is the remain capacity of PSU's at 100% brightness and white color content
- 3- Different types of video input available as option

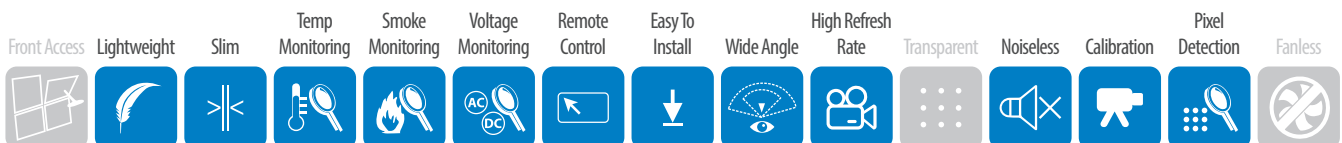

Apron Teknoloji AS. reserves the right to change any product specification, discontinue of any product or services without prior notice