

ULTRA LDSICP01.5UL

SMALL PIXEL PITCH LED DISPLAYS FOR
HIGH PRECISION & HIGH DEFINITION & HIGH
RESOLUTION LED WALL PROJECTS



- Ultra quality for ultra high definition requirements
- Optimized for meeting room and broadcast studio installations
- Fanless design without noise
- Super high gray scale and refresh rate
- High reliability and stability for 7/24 operation
- Special mask design to reduce moire effect in broadcast studio projects

TV NET

İSTANBUL / TÜRKİYE



General

Operating environment	indoor
Pixel pitch	1.56mm
Service type	front and rear access
Calibrated brightness	>800nits
Lamp type	Flip Chip COB
Lifespan (hours at %50 brightness)	>100.000hours
White color calibration (adj.)	3.000K~8.500K
Gray scale	>16bits
Brightness control	256 level
Screen surface temprature(°C)	~41°C @600nits

Module Specifications

Module material	-
Refresh frequency	3.840Hz
LED drive method	dynamic
Module material	aluminum
Module type	apparent
PCB type	multilayer
PCB surface coating	humiseal

Panel Specifications¹⁾

Panel material	aluminum
Panel dimensions 'mm'	600x337.5
Diagonal size	27" [16.9]
Panel weight	<5kg
Panel resolution	384x216px
Viewing angle (horizontal x vertical)	>175°x175°
Minimum viewing distance	>1.5m
Operating temperature range	0°C ~ +50°C
Storage temperature range	-20°C ~ +60°C

Operating humidity	10% ~ 90% non-condensing
Power input voltage	110 ~ 240 VAC
Power input frequency	50 ~ 60 Hz
Average power per sqm	<80W
Max power per sqm	<400W
Active PFC	YES
Load tolerance ²⁾	25% min.
Panel installation type	Fixed installation
Cooling	Passive cooling

Output resolution	FHD, UHD, 4K, 8K
Positioning pin	YES
Max input resolution	4096x2160px
Standard video sources ³⁾	All digital formats
Brightness adjustment	Automatic & manual
Death pixel monitoring	Optional
Module monitoring	YES
Temperature monitoring	YES
Smoke monitoring	Optional
Voltage monitoring	YES
Power redundancy	N/A
Signal path backup	YES
Signal transmission	CAT or Fiber Optic
Standby scheduling	YES
Safety rope	-
Impact resistance	High
Power on/off scheduling	Optional
Power saving mode	YES
Flame retardancy	Passed BS476-7 CLASS B test
Certification	CE-EMC, CE-LVD, RoHS, FCC


Options

*The mechanical and electronic specification options are available.

1- Panel dimensions can change upon customer request

2- That value is the remain capacity of PSU's at 100% brightness and white color content

3- Different types of video input available as option

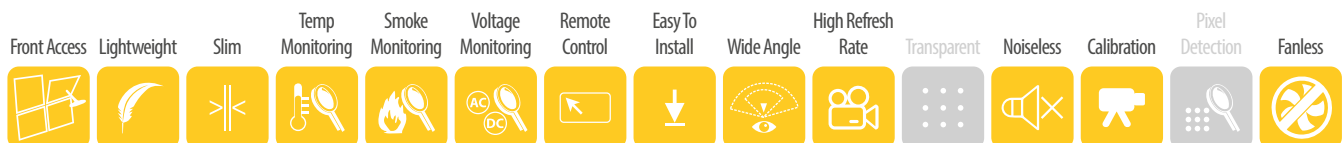

Apron Teknoloji AS. reserves the right to change any product specification, discontinue of any product or services without prior notice

TECHNICAL SPECIFICATIONS

LEDECA